



Concrete Colors

Semi-Transparent Stain

SEAL-KRETE® Concrete Colors is a ready to use, semi-transparent stain that transforms bare concrete into a decorative living space. It highlights the variations in surface texture and porosity to create a custom, multi-toned effect similar to that found in natural stone. Different effects can be achieved by combining colors or using faux finish application techniques. This urethane-fortified, acrylic formula is non-toxic, non-hazardous, and environmentally safe. It's also UV-resistant, flexible and hard-wearing, making it ideal for surfaces like patios, driveways, garage floors, pool decks, entryways and even basements.

Important: Read all instructions thoroughly. Wear safety goggles with side shields, rubber gloves and protective footwear.

SURFACE PREP

Note: Proper surface prep is critical to product performance. A poorly prepared surface will repel the product.

The surface must be clean, dry and free of dust, oil, wax and grease before proceeding with any coating project. New concrete must have cured for at least 30 days before application. Use an oil stain remover (we recommend Seal-Krete OSR®) to lift stubborn oil stains. Etch smooth-finished surfaces (basements, garage floors, et al.) with a concrete etching solution (we recommend Seal-Krete Clean-N-Etch®). If muriatic acid is used for etching, neutralize the concrete before stain application. Broom-scrubbing with a solution of baking soda and water works well. A final, thorough, power-wash rinse is recommended. Turn sprinkler systems off until stain has dried.

APPLICATION

Read "LIMITATIONS" section before use. Concrete Colors is ready to use, do not dilute. If more than 1 gallon of the same color is used, intermix product and stir well. Color and opacity will vary with concrete composition, texture, surface imperfections and application method. Test a small sample area first. One coat provides a light colorwash effect. Two coats creates a more uniform, opaque look. Allow 2 hours for stain to soak in and settle into cracks/crevices before evaluating color and deciding to apply a second coat.

Roller Application: Use a short nap (3/8") roller cover and apply in small (4'x 4') sections. Work quickly, feathering the edges.

Airless HVLP or Quality Pump Sprayer: Use .011-.013 tip for airless sprayers, or a fan spray for pump sprayer and apply to small sections in a circular motion. Backroll immediately after spray for uniformity.

Two-Color Application: For a natural stone-like finish, use a dual sponge roller.

Other Applications: Two or more colors are ideal for faux effects. You can also complete sponge or rag techniques as with any paint. Remember that Concrete Colors is semi-transparent, so applying one color over another will create a third, new color.

TOPCOAT: To extend the life of your finish and maintain a natural look, topcoat with Seal-Krete Clear-Seal Low Gloss Sealer after stain has dried at least 24 hours (see dry time). For a high gloss finish, topcoat with Seal-Krete Clear-Seal High Gloss Sealer.

COVERAGE: 300-500 sq. ft. pr gallon, depending on surface porosity and texture.

DRY TIME (77°F, 50% relative humidity): Light foot traffic, 24 hours. Heavy foot traffic or furniture placement, 72 hours. Vehicle traffic, 5 days. Dry time will be longer in cool temperatures or high humidity environments.

CLEAN-UP & STORAGE: Clean tools with soap and water immediately after use. Store product in a dry area above 32°F. Wait 30 days before cleaning surface with a mild soap and water solution.

LIMITATIONS: Use only when temperature is 50°-90°F (10°-32°C). Do not apply in direct sunlight or if rain/heavy dew is expected within 24 hours. Do not use in areas subject to hydrostatic pressure. Smooth finished concrete may be slippery when wet. Try using an anti-skid additive (like Seal-Krete Clear Grip®) for added safety in high foot-traffic areas.

FIRST AID: In case of eye contact, flush thoroughly with large amounts of water for 15 minutes and get medical attention. For skin contact, wash thoroughly with soap and water. In case of respiratory difficulty, provide fresh air and call physician. If swallowed, do not induce vomiting. Give one or two glasses of water and get medical attention immediately. **DO NOT TAKE INTERNALLY. KEEP OUT OF REACH OF CHILDREN.**



A beautiful, natural stone-look!

Product	No.	Unit	UPC Code	Carton Bar Code	Carton Size (L x W x H)	Carton Size (cubic ft / lbs)	Carton Qty	Pallet Qty
Terra Cotta	310001	1 gallon	0 15944 31001 6	9 00 15944 31001 9	14 x 14 x 8	.91 / 40	4	45 cases
Brownstone	320001	1 gallon	0 15944 32001 5	9 00 15944 32001 8	14 x 14 x 8	.91 / 40	4	45 cases
Sandstone	330001	1 gallon	0 15944 33001 4	9 00 15944 33001 7	14 x 14 x 8	.91 / 40	4	45 cases
Cobblestone	340001	1 gallon	0 15944 34001 3	9 00 15944 34001 6	14 x 14 x 8	.91 / 40	4	45 cases
Tuscany	333001	1 gallon	0 15944 33301 5	9 00 15944 33301 8	14 x 14 x 8	.91 / 40	4	45 cases
Patina	351001	1 gallon	0 15944 35101 9	9 00 15944 35101 2	14 x 14 x 8	.91 / 40	4	45 cases



DECORATIVE STAIN FOR CONCRETE PATIOS, DRIVEWAYS & MORE!
GREAT FOR FAUX FINISHES • PENETRATES & PROTECTS • LOW ODOR • LOW VOC



Concrete Colors Semi-Transparent Stain

PROPERTIES

- Matte finish
- Easy to apply
- Beautifies and protects
- Helps prevent cracking and pockmarking
- Salt and chlorine-resistant
- Resists mold and mildew growth
- Interior/Exterior use
- Premium, urethane-fortified acrylic formula
- Provides a traditional, natural stone look
- VOC < 100 g/l – EPA Method 24 – Floor Category
- Ultra low odor
- Complies with California air pollution regulations
- Great for stencil effects and faux finishes


LIMITED WARRANTY: Manufacturer/Seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of Seal-Krete product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.

TECHNICAL SUPPORT: For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am–5:00 pm EST) or visit our website at www.seal-krete.com.

**Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or www.epa.gov/lead.*

Premixed colors

No. 310 Terra Cotta	No. 320 Brownstone
No. 330 Sandstone	No. 340 Cobblestone
No. 333 Tuscany	No. 351 Patina

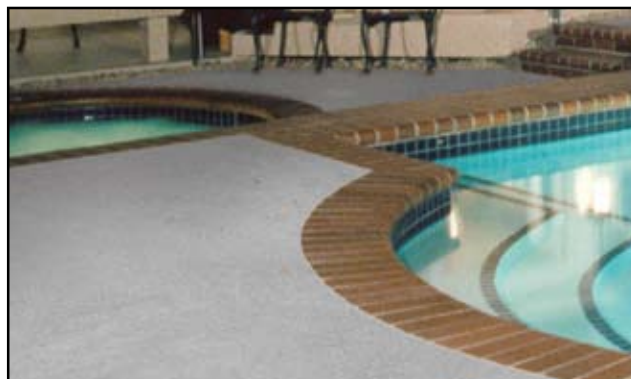

Transform Bare Concrete...



...Into a Decorative Living Space



Convenience Products

306 Gandy Rd., Auburndale, FL 33823 USA

Questions or comments? e-mail: tech@seal-krete.com or call 1-800-323-7357

Country of Origin: U.S.A.

How to treat concrete®

www.seal-krete.com