

SEAL KRETE®

ORIGINAL

CLEAR WATERPROOFING SEALER

PRODUCT DATA

VOCs Less than
50 grams/liter

SEAL-KRETE® Original protects vertical concrete and masonry against the damaging effects of moisture penetration. It penetrates deeply into concrete pores, binding sand and cement particles to form a tough, flexible, breathable film. SEAL-KRETE Original is excellent for binding chalky surfaces to improve paint adhesion on all painted and unpainted substrates including concrete block, stucco, aluminum siding, drywall, and plaster. It strengthens mortar joints, reduces efflorescence on brick, and rejuvenates color on older painted surfaces like aged vinyl siding and stucco.

Important: Read all directions thoroughly. Recommended: Wear gloves and safety glasses.

ON VERTICAL SURFACES, SEAL-KRETE Original...

- **SEALS & PROTECTS** concrete and masonry from the damaging effects of water penetration. Provides a tough, flexible film that lasts up to 5 years.
- **REJUVENATES** old brick and plaster to "like new" condition. Binds and waterproofs old mortar and brick. Reduces efflorescence.
- **BRIGHTENS** painted aluminum siding (mobile homes). Rejuvenates color on older painted surfaces (aged vinyl siding and stucco).
- **GREAT PAINT ADDITIVE & EXTENDS PAINT LIFE.** It also improves spread rate, increases coverage and cuts applications time. 4-8 oz. of Seal-Krete Original is recommended per gallon of latex paint.
- **PRIMES** vinyl siding to increase paint adhesion. Binds chalky surfaces.
- **BUFFERS pH** in hot cement, plaster and stucco, allowing surface to be painted during the curing period (usually within 10 days).

ON HORIZONTAL SURFACES, SEAL-KRETE Original...

- **PRIMES** for paints, stains and textured coatings.
- Prepares (dustproofs) interior concrete floors prior to installation of carpet, tile or wood flooring.

SURFACE PREP

Surface must be clean and dry. Remove loose paint and excessive chalk. Repair cracks and surface breaks. Cover windows, doors, etc. and use caution when applying on windy days.

APPLICATION

Read "LIMITATIONS" section before use. This sealer is ready to use; do not dilute. Apply with a brush, roller or sprayer (garden or airless). Backroll spray applications to ensure penetration. Apply at least two coats, allowing two hours dry time between coats. Remove any overspray immediately with water. **Note:** Sealer appears milky white during application but dries to a clear finish.

COVERAGE: 80-300 sq.ft. per gal., depending on surface porosity. Second coat application is 50% greater.

DRY TIME: 2-4 hours, depending on temperature and humidity.

CLEAN-UP & STORAGE: Clean all tools immediately after use with soap and water. Store unused product in a dry place above 32°F.

TOPCOATING: May be topcoated with latex, oil-based or elastomeric coating when dry.

TINTING: May be tinted with universal colorants (up to 4 oz./ gal.).

LIMITATIONS: Use on above grade vertical surfaces or as a primer on horizontal surfaces – not for below grade use. Do not apply if rain is expected within 12 hours or if temperatures fall below 50°F within 24 hours of application. Do not use on swimming pools, bird baths, water features, cedar, redwood or in areas where hydrostatic pressure is likely to develop. Do not use on very porous substrates like low density, decorative block (use SEAL-KRETE Heavy Duty instead). Keep from freezing.

CAUTION: Avoid contact with eyes and prolonged contact with skin. Do not ingest. In case of eye contact, flush thoroughly with water. For skin contact, wash with soap and water. If swallowed, do not induce vomiting. Drink 1-2 glasses of water and get medical attention.

KEEP OUT OF REACH OF CHILDREN/PETS.



| Product | No. | Unit | UPC Code | Carton Bar Code | Carton Size (L x W x H) | Carton Size (cubic ft / lbs) | Carton Qty | Pallet Qty |
|----------|--------|----------|-----------------|--------------------|----------------------------|---------------------------------|------------|------------|
| Original | 100001 | 1 gallon | 0 15944 10001 3 | 9 00 15944 10001 6 | 15 x 9.5 x 12.5 | 1.03 / 36 | 4 | 36 |
| Original | 100005 | 5 gallon | 0 15944 10005 1 | - | 12 x 12 x 15 | 1.25 / 44 | 1 | 36 |



**SEALS STUCCO, BRICK, CONCRETE, PAINTED METAL & MORE • EXTENDS PAINT LIFE
REJUVENATES PAINTED SURFACES & FADED VINYL SIDING • PREPS FOR RE-PAINTING • LOW ODOR**



ORIGINAL

CLEAR WATERPROOFING SEALER

ASTM / FEDERAL TEST STANDARDS

SEAL-KRETE Original meets or exceeds:

- ASTM E-514-74 Water Permeance of Masonry (62 mph wind driven rain test)
- ASTM D-1653 Moisture Vapor Transmission
- ASTM D-3960 VOC Compliant (less than 50 g per liter)
- Federal Specification TT-P-0035 for Water Permeability (98 mph wind driven rain test)
- Meets USDA criteria for a structural surface coating that may come in contact with food.
- OTC-compliant

LIQUID PROPERTIES

Solids: 10%

Proprietary Acrylic Resin

Water Based

Odor: Low

Appearance: Milky White, Dries Clear

VOC < 50 g/l – EPA Method 24 – Waterproofing Sealer

COVERAGE GUIDELINES

Material Coverage
Approx. sq.ft./gal.

| | |
|------------------------|-----|
| Stucco/Simulated Brick | 150 |
| Concrete Slab/Tilt-ups | 175 |
| Concrete Blocks | 80 |
| Brick | 125 |
| Wood Fencing | 175 |
| Aluminum Siding | 300 |
| Galvanized Metal | 300 |
| Adobe | 100 |
| Chalky Surfaces | 300 |

Note: Actual coverage will vary depending on porosity of surface. Use a high-solids formula, like SEAL-KRETE Heavy Duty, for low-density, decorative block (split-face/fluted block).

LIMITED 5-YEAR WARRANTY: A limited 5-year warranty is available on the quality and performance of this product on a per job basis. Contact our technical service dept. for details on this warranty program. Otherwise, manufacturer/seller makes no warranty of any kind except that this product is free from defect and is of merchantable quality. Buyer remedy for breach of warranty is limited to replacement of product or refund of purchase price. Convenience Products will not be responsible for labor or the cost of labor for removal or application of any product.

TECHNICAL SUPPORT: For more information on surface prep or application guidelines, or to obtain a Material Safety Data Sheet, call 1-800-323-7357, M-F (8:00 am – 5:00 pm EST) or visit our website at www.seal-krete.com.


*Sanding or removing paint containing lead may be hazardous. For information contact the National Lead Information Center at 1-800-424-LEAD or www.epa.gov/lead.

WATER BASED ACRYLIC FORMULA

INTERIOR/EXTERIOR ABOVE GRADE USE



**SEALS AND PROTECTS
STUCCO, BRICK,
CONCRETE, PAINTED
METAL AND MORE**

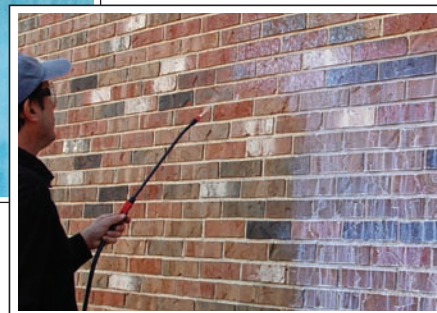

GOES ON WHITE, DRIES CLEAR



**REJUVENATES FADED
VINYL AND METAL**



**REDUCES MOLD &
MILDEW GROWTH**

**BINDS
CHALKING
SURFACES**



**GREAT
PAINT
ADDITIVE**

Country of Origin: U.S.A.



Convenience Products

306 Gandy Rd., Auburndale, FL 33823 USA

Questions or comments? e-mail: tech@seal-krete.com or call 1-800-323-7357

How to treat concrete®

www.seal-krete.com